


CERAMIC CONNECTORS

PART No.	WAYS	AMP	CABLE SIZE	INSERT BORE	MOUNT HOLE	LENGTH mm	HEIGHT mm	WIDTH mm
C1	1	10	6	3.6	NONE	9.1	15	21
B102E	2	10	6	3.2	1	23	18	19
B162E	2	30	16	3.2	1	34	21	29
B103E	3	15	6	4.7	2	54	20	24
B163E	3	30	16	4.7	2	52	22	29

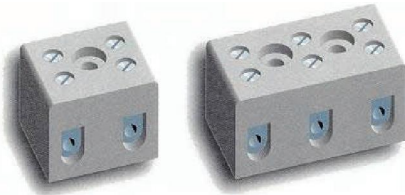

PVC SLEEVING

Available with ID from 1.0mm to 65.0mm in clear, black, blue, green, orange, red, white, yellow & brown. ID increments in 0.5mm up to 5.5mm ID & then 1.0mm up to 28mm ID. (AS3147 & AS3191)



PART No. SLPV (SIZE & COLOUR)

ELECTRICAL TAPES

Electrical tape

Type 2501



Self amalgamating tape. An elastic tape up to 46kV insulation properties. Water, ozone & corrosion resistant. Temp range 40 - 90oC. Used for cable splitting & terminating, water proofing & corrosion protection.

Scotch 23



Self fusing tape, 69kVinsulation EPR-based, corona-resistant insulating tape, which provides a void-free, moisture resistant electrical insulation.

PART No.	DESCRIPTION	WIDTH	LENGTH	COLOUR
250119	Self Amalgamating Tape	19mm	10m	Black
250125	Self Amalgamating Tape	25mm	10m	Black
250150	Self Amalgamating Tape	50mm	10m	Black
SCOTCH23	65kv Rubber Splicing Tape	19mm	9.15m	Black
SCOTCH70	65kv Self-Fusing Silicone Rubber	25.4mm	9.15m	Grey
SCOTCHFIL	Butyl Rubber Putty	38mm	2x3m	Black
PVC	PVC Tape	19mm	20m	Blk, Rd, Wh, Blu, G/Y & Assorted