

# **GVK**

**G.V.KINSMAN PTY. LTD.**

[www.gvk.com.au](http://www.gvk.com.au)

**INDUSTRIAL ELECTRICAL PRODUCT  
COMPANY**

## **PRESSLOCK**

# **THREADLESS METAL CONDUIT RANGE**



**660 SOMMERVILLE ROAD, WEST SUNSHINE, VIC 3020**  
**PHONE:(03) 9312 6633 FAX:(03) 9312 6433**

# PRESSLOCK

## THREADLESS METAL CONDUIT FITTINGS

**SAVE TIME, MONEY & INCREASE PROFITS WITH PRESSLOCK'S CONDUIT FITTINGS**

**\*UNIQUE PRODUCT DESIGNED BY ELECTRICIANS FOR ELECTRICIANS\***

**CLIENTS WILL BE IMPRESSED BY A MECHANICALLY PROTECTED  
QUALITY INSTALLATION USING PRESSLOCK CONDUIT FITTINGS**

**TESTED AND APPROVED BY AUSTRALIAN STANDARDS AUTHORITY**

**CONFORMS TO AS/NZS 2053.7:2002 (APPROVAL NO# A/10278EA)**

**"CONDUITS AND FITTINGS FOR ELECTRICAL INSTALLATIONS & RIGID METAL CONDUIT FITTINGS"**

**COMPATIBLE WITH SCREWED STEEL AND PVC CONDUIT USING SPECIALLY DESIGNED FITTINGS  
PRESSLOCK PRODUCTS ARE RATED AT IP 65 AGAINST**

- EXTERNAL INFLUENCES
- INGRESS OF WATER
- INGRESS OF SOLID FOREIGN OBJECTS
- CORROSIVE AND POLLUTING SUBSTANCES
- SOLAR RADIATION
- RESISTANCE TO WATER

### FOR USE IN MULTIPLE APPLICATIONS

- **ELECTRICAL INSTALLATION 240V/415V**
- **INTERNAL & EXTERNAL USE**
- **FIBER, SECURITY & DATA INSTALLATIONS**
- **INDUSTRIAL, COMMERCIAL, DOMESTIC**
- **HEAVY INDUSTRIAL**
- **PLANT ROOMS**
- **SCHOOLS**
- **HOSPITALS**
- **STAIRWELLS**
- **SILO'S**
- **ELEVATOR SHAFTS**

*Refineries, Mining, Mills, Smelters, Port Authorities, Transport, Defence*

**NOTE:**

**MANUFACTURER RECOMMENDS LOCTITE 510 OR EQUIVALENT GASKET FLANGE SEALANT BE USED IN CONJUNCTION WITH PRESSLOCK PRODUCTS TO ATTAIN THE IP65 RATING**



# PRESSLOCK

## THREADLESS METAL CONDUIT FITTINGS



TESTED AND APPROVED BY  
AUSTRALIAN STANDARDS  
AUTHORITY AND  
CONFORMING TO  
AS/NZS 2053.7:2002  
APPROVAL NO#  
A/10278EA  
CONDUITS AND FITTINGS  
FOR ELECTRICAL  
INSTALLATIONS AND RIGID  
METAL CONDUIT FITTINGS

INGRESS IP RATING :

**IP 65**

RATED FOR USE IN  
APPLICATIONS OF  
240/415 VOLTS

TESTED FOR EARTH  
CONTINUITY  $0.01\Omega$



# PRESSLOCK

## THREADLESS METAL CONDUIT FITTINGS



METAL 1 WAY SHALLOW JUNCTION BOX		
PART NO#	SIZE	QTY
P20-M1WB	20MM	10
P25-M1WB	25MM	10



METAL 2 WAY SHALLOW JUNCTION BOX		
PART NO#	SIZE	QTY
P20-M2WB	20MM	10
P25-M2WB	25MM	10



METAL 3 WAY SHALLOW JUNCTION BOX		
PART NO#	SIZE	QTY
P20-M3WB	20MM	10
P25-M3WB	25MM	10



METAL 4 WAY SHALLOW JUNCTION BOX		
PART NO#	SIZE	QTY
P20-M4WB	20MM	10
P25-M4WB	25MM	10

# PRESSLOCK

## THREADLESS METAL CONDUIT FITTINGS



### METAL INSPECTION TEE

PART NO#	SIZE	QTY
P20-MINTEE	20MM	10
P25-MINTEE	25MM	10



### METAL INSPECTION ELBOW

PART NO#	SIZE	QTY
P20-MINELB	20MM	10
P25-MINELB	25MM	10



### METAL PLAIN ELBOW

PART NO#	SIZE	QTY
P20-MELB	20MM	10
P25-MELB	N/A	N/A



### METAL PLAIN BEND

PART NO#	SIZE	QTY
P20-MBEND	20MM	10
P25-MBEND	25MM	10



# PRESSLOCK

## THREADLESS METAL CONDUIT FITTINGS



### METAL PLAIN JOINING COUPLING

PART NO#	SIZE	QTY
P20-MCOUP	20MM	20
P25-MCOUP	25MM	20



### METAL FEMALE PLAIN TO SCREWED COUPLING

PART NO#	SIZE	QTY
P20-MFSCOUP	20MM	20
P25-MFSCOUP	25MM	10



### METAL PLAIN TO SCREWED ADAPTOR

PART NO#	SIZE	QTY
P20-MSAD	20MM	20
P25-MSAD	25MM	10



### METAL LOCK NUT

PART NO#	SIZE	QTY
P20-MLN	20MM	50
P25-MLN	25MM	50




### METAL 25/20 CONDUIT REDUCER

PART NO#	SIZE	QTY
P25/20-MCR	25/20MM	20

# PRESSLOCK

## THREADLESS METAL CONDUIT FITTINGS

PART NUMBER	DESCRIPTION
P20-M1WB	METAL 20MM 1 WAY SHALLOW JUNCTION BOX
P25-M1WB	METAL 25MM 1 WAY SHALLOW JUNCTION BOX
P20-M2WB	METAL 20MM 2 WAY SHALLOW JUNCTION BOX
P25-M2WB	METAL 25MM 2 WAY SHALLOW JUNCTION BOX
P20-M3WB	METAL 20MM 3 WAY SHALLOW JUNCTION BOX
P25-M3WB	METAL 25MM 3 WAY SHALLOW JUNCTION BOX
P20-M4WB	METAL 20MM 4 WAY SHALLOW JUNCTION BOX
P25-M4WB	METAL 25MM 4 WAY SHALLOW JUNCTION BOX
P20-MINTEE	METAL 20MM INSPECTION TEE
P25-MINTEE	METAL 25MM INSPECTION TEE
P20-MINELB	METAL 20MM INSPECTION ELBOW
P25-MINELB	METAL 25MM INSPECTION ELBOW
P20-MBEND	METAL 20MM PLAIN BEND
P25-MBEND	METAL 25MM PLAIN BEND
P20-MELB	METAL 20MM PLAIN ELBOW
P25-MELB	25MM NOT AVAILABLE
P20-MCOUP	METAL 20MM PLAIN JOINING COUPLING
P25-MCOUP	METAL 25MM PLAIN JOINING COUPLING
P20-MFSCOUP	METAL 20MM FEMALE PLAIN TO SCREWED COUPLING
P25-MFSCOUP	METAL 25MM FEMALE PLAIN TO SCREWED COUPLING
P20-MSAD	METAL 20MM PLAIN TO SCREWED ADAPTOR
P25-MSAD	METAL 25MM PLAIN TO SCREWED ADAPTOR
P20-MLN	METAL 20MM LOCKNUT
P25-MLN	METAL 25MM LOCKNUT
P25-MCR	METAL 25/20 CONDUIT REDUCER
P20-SSS	METAL 20MM SINGLE SIDED SADDLE
P25-SSS	METAL 25MM SINGLE SIDED SADDLE

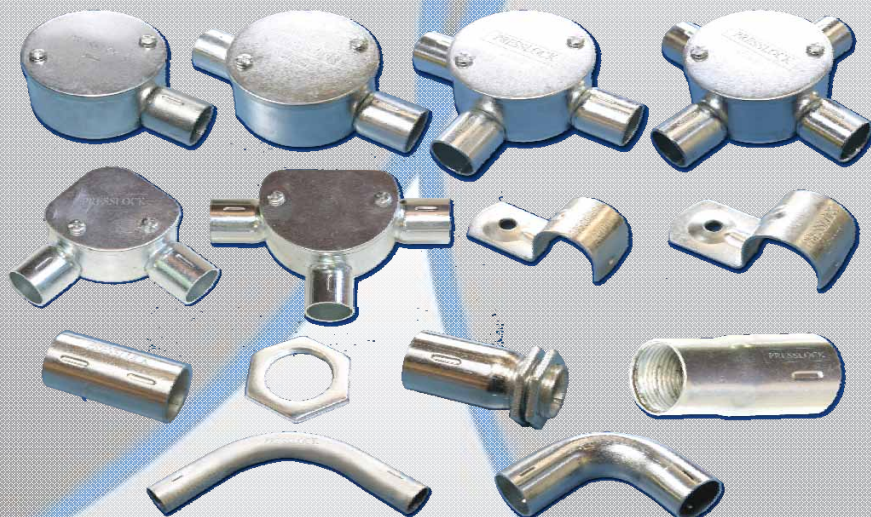

**NOTE:**

MANUFACTURER RECOMMENDS LOCTITE 510 OR EQUIVALENT GASKET FLANGE SEALANT BE USED IN CONJUNCTION WITH PRESSLOCK PRODUCTS TO ATTAIN THE IP65 RATING