


CONTENTS



UNINSULATED & PREINSULATE TERMINALS


SECTION 4

SECTION 4	BI-METAL LUGS & LINKS NON-INSULATED PRE-INSULATED LUGS & LINKS . . .31
	UNINSULATED RING TERMINAL UTILUG32
	PRE-INSULATED RING TERMINAL UTILUG33
	RING TERMINAL SUPERGRIP UTILUG34
	UNINSULATED FORK UTILUG35
	SUPERGRIP FORK UTILUG35
	PRE-INSULATED FORK UTILUG36
	HIGH TEMPERATURE UTILUG RING TERMINAL36
	HEAVY DUTY INSULATED RING TERMINAL37
	BOOTLACE FERRULES37
	DUAL BOOTLACE FERRULES37
	UNINSULATED CRIMP PIN CONNECTOR38
	PRE-INSULATED PIN CONNECTOR38
	SUPERGRIP PIN CONNECTOR38
	PRE-INSULATED AND SUPERGRIP CRIMP LINK CABLE CONNECTOR39
	CLOSED END PRE-INSULATED CABLE CONNECTOR39
	HEAVY DUTY PRE-INSULATED
	CRIMP LINK CONNECTOR40
	2.8MM Q.C. RECEPTACLE40
	4.8MM Q.C. RECEPTACLES TO SUIT
	0.5MM TABS40
	6.3MM Q.C. RECEPTACLES TO SUIT
	0.8MM TABS41
	6.3MM Q.C. TABS41
	6.3MM ADAPTORS Q.C. PIGGY BACK41
	9.3MM Q.C. RECEPTACLES41
	LIP BLADE TERMINALS42
	BULLET TERMINAL42
	BULLET RECEPTACLE42
	LOOSE PIECE BRASS CONNECTORS43
	TK22 ELECTRICAL TERMINAL KIT44

UNINSULATED RING TERMINAL UTILUG



- Electro tinned to minimise corrosion
- Serrated barrel provides secure mechanical and electrical connection
- Also available in continuous strip form
- Suitable for small flexible cables




DESCRPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	DIMENSIONS mm					TOOL NO.
					A	B	C	E	F	
UR1.5M1.6	H3110	NO.1 22-16AWG	0.5	M1.6	12.5	5.5	0.7	2.5	4.8	00 76A 16B 18 63-1
UR1.5M3S	H3111			M3	12.5	5.5	0.7	3.7	4.8	
UR1.5M3M	H3116			M3	14.4	6.6	0.7	3.7	4.8	
UR1.5M3L	H3112			M3	15.8	8.0	0.7	3.7	4.8	
UR1.5M4S	H3113			M4	14.4	6.6	0.7	4.3	4.8	
UR1.5M4L	H3114		M4	15.8	8.0	0.7	4.3	4.8		
UR1.5M5S	H3115		M5	15.8	8.0	0.7	5.3	4.8		
UR1.5M5L	H3117		M5	21.8	11.6	0.7	5.3	4.8		
UR1.5M6	H3118		M6	21.8	11.6	0.7	6.4	4.8		
UR1.5M8	H3119		M8	21.8	11.6	0.7	8.4	4.8		
UR1.5M10	H3140	M10	25.5	13.6	0.7	10.5	4.8			
UR2.5M3S	H3120	NO.2 16-14AWG	1.5	M3	14.4	6.6	0.8	3.7	4.8	00 76A 16B 18 63-1
UR2.5M3L	H3121			M3	16.8	8.5	0.8	3.7	4.8	
UR2.5M4S	H3122			M4	14.4	6.6	0.8	4.3	4.8	
UR2.5M4L	H3123			M4	16.8	8.5	0.8	4.3	4.8	
UR2.5M5S	H3125			M5	16.8	8.5	0.8	5.3	4.8	
UR2.5M5L	H3126		M5	16.8	9.5	0.8	5.3	4.8		
UR2.5M6	H3127		M6	21.8	12.0	0.8	6.4	4.8		
UR2.5M8	H3128		M8	21.8	12.0	0.8	8.4	4.8		
UR2.5M10	H3129		M10	25.5	13.6	0.8	10.5	4.8		
UR6M3	H3132		NO.3 12-10AWG	2.5	M3	15.7	7.2	1.0	3.7	
UR6M4S	H3130	M4			15.7	7.2	1.0	4.3	6.0	
UR6M4L	H3131	M4			19.6	9.5	1.0	4.3	6.0	
UR6M5	H3133	M5			19.6	9.5	1.0	5.3	6.0	
UR6M6	H3134	M6			22.5	12.0	1.0	6.4	6.0	
UR6M8	H3137	M8		27.0	15.0	1.0	8.4	6.0		
UR6M10	H3138	M10		27.0	15.0	1.0	10.5	6.0		
UR6M12	H3139	M12		31.6	19.2	1.0	13.0	6.0		
UR6M16	H3161	M16		47.6	31.8	0.9	31.8	6.6		
UR6M18	H3162	M18		47.6	31.8	0.9	31.8	6.6		
UR8.5M6	H3183	NO.4 10-8AWG	6.0	M6	23.8	12.0	1.2	6.4	8.5	00 18 124
UR8.5M10	H3185A		TO	M10	29.8	15.0	1.2	10.5	8.5	
UR8.5M16	H3187A		8.5	M16	50.0	31.6	1.2	15.0	8.5	
UR20M12	H1851B	5AWG	20.0	M12	54.0	31.8	1.8	15.0	15.9	20
UR20M16	H1851	5AWG	20.0	M16	54.0	31.8	1.8	15.0	15.9	

PRE-INSULATED RING TERMINAL UTILUG



- Copper electro tinned to minimise corrosion
- PVC insulation for insulation support





DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	A	B	C	E	F	MAX. INSUL. DIA. mm	TOOL NO.
RRM1.6	H4110	NO.1 RED 22-16AWG	0.5 TO 1.5	M1.6	17.5	5.5	0.7	3.2	10.0	3.5	76A 11C 11B 63-4B 102 120
RRM3S	H4111			M3	17.5	5.5	0.7	3.7	10.0		
RRM3M	H4116			M3	19.4	6.6	0.7	3.7	10.0		
RRM3L	H4112			M3	20.8	8.0	0.7	3.7	10.0		
RRM4S	H4113			M4	19.4	6.6	0.7	4.3	10.0		
RRM4L	H4114			M4	20.8	8.0	0.7	4.3	10.0		
RRM5S	H4115			M5	20.8	8.0	0.7	5.3	10.0		
RRM5L	H4117			M5	26.8	11.6	0.7	5.3	10.0		
RRM6	H4118			M6	26.8	11.6	0.7	6.4	10.0		
RRM8	H4119			M8	26.8	11.6	0.7	8.4	10.0		
RRM10	H4140	M10	30.5	13.6	0.7	10.5	10.0				
BRM3S	H4120	NO.2 BLUE 16-14AWG	1.5 TO 2.5	M3	19.4	6.6	0.8	3.7	10.0	4.3	76A 12C 12B 63-4U 102 120
BRM3L	H4121			M3	21.8	8.5	0.8	3.7	10.0		
BRM4M	H4124			M4	17.8	6.6	0.8	3.7	10.0		
BRM4S	H4122			M4	19.4	6.6	0.8	4.3	10.0		
BRM4L	H4123			M4	21.8	8.5	0.8	4.3	10.0		
BRM5S	H4125			M5	21.8	8.5	0.8	5.3	10.0		
BRM5L	H4126			M5	21.8	9.5	0.8	5.3	10.0		
BRM6	H4127			M6	26.8	12.0	0.8	6.4	10.0		
BRM8	H4128			M8	26.8	12.0	0.8	8.4	10.0		
BRM10	H4129			M10	30.5	13.6	0.8	10.5	10.0		
YRM3	H4132	NO.3 YELLOW 12-10AWG	2.5 TO 6.0	M3	22.7	7.2	1.0	3.7	10.0	6.1	76A 13B 63-5U 102 120
YRM4S	H4130			M4	22.7	7.2	1.0	4.3	10.0		
YRM4L	H4131			M4	26.6	9.5	1.0	4.3	10.0		
YRM5	H4133			M5	26.6	9.5	1.0	5.3	10.0		
YRM6	H4134			M6	29.5	12.0	1.0	6.4	10.0		
YRM8	H4137			M8	34.0	15.0	1.0	8.4	10.0		
YRM10	H4138			M10	34.0	15.0	1.0	10.5	10.0		
YRM12	H4139			M12	38.6	19.2	1.0	13.0	10.0		
YRM18	H4162			M18	54.8	31.8	0.9	31.8	13.5		

RING TERMINAL SUPERGRIP UTILUG



- Fitted with a copper ferrule and pre-insulated for secure insulation support
- Copper electro tinned to minimise corrosion
- Serrated barrel provides secure mechanical and electrical connection




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	DIMENSIONS mm					MAX. INSUL. DIA. mm	TOOL NO.		
					A	B	C	E	F				
MYRSGM4	H4202	YELLOW	0.2 TO	M4	19.0	6.6	0.5	6.6	8.0	2.4	78		
MYRSGM5	H4203	26-22AWG	0.5	M5	19.0	8.0	0.5	8.0	8.0				
RRSGM1.6	H4210	NO.1 RED	0.5 TO	M1.6	18.0	5.5	0.7	3.2	10.5	3.5	11C 11B 76B 63-4B 102 120		
RRSGM3S	H4211			M3	18.0	5.5	0.7	3.7	10.5				
RRSGM3M	H4216			M3	19.9	6.6	0.7	3.7	10.5				
RRSGM3L	H4212			M3	21.3	8.0	0.7	3.7	10.5				
RRSGM4S	H4213			M4	19.9	6.6	0.7	4.3	10.5				
RRSGM4L	H4214			M4	21.3	8.0	0.7	4.3	10.5				
RRSGM5S	H4215			M5	21.3	8.0	0.7	5.3	10.5				
RRSGM5L	H4217			22-16AWG	1.5	M5	27.3	11.6	0.7			5.3	10.5
RRSGM6	H4218			M6	27.3	11.6	0.7	6.4	10.5				
RRSGM8	H4219			M8	27.3	11.6	0.7	8.4	10.5				
RRSGM10	H4240	M10	31.0	13.6	0.7	10.5	10.5						
BRS GM3S	H4220	NO.2 BLUE	1.5 TO	M3	19.9	6.6	0.8	3.7	10.5	4.3	12C 12B 76B 63-4U 102 120		
BRS GM3L	H4221			M3	22.3	8.5	0.8	3.7	10.5				
BRS GM4S	H4222			M4	19.9	6.6	0.8	4.3	10.5				
BRS GM4L	H4223			M4	22.3	8.5	0.8	4.3	10.5				
BRS GM5S	H4225			M5	22.3	8.5	0.8	5.3	10.5				
BRS GM5L	H4226			M5	22.3	9.5	0.8	5.3	10.5				
BRS GM6	H4227			16-14AWG	2.5	M6	27.3	12.0	0.8			6.4	10.5
BRS GM8	H4228			M8	27.3	12.0	0.8	8.4	10.5				
BRS GM10	H4229			M10	31.0	13.6	0.8	10.5	10.5				
YRSGM3	H4232			NO.3 YELLOW	2.5 TO	M3	23.2	7.2	1.0			3.7	13.5
YRSGM4S	H4230	M4	23.2			7.2	1.0	4.3	13.5				
YRSGM4L	H4231	M4	27.1			9.5	1.0	4.3	13.5				
YRSGM5	H4233	M5	27.1			9.5	1.0	5.3	13.5				
YRSGM6	H4234	M6	30.0			12.0	1.0	6.4	13.5				
YRSGM8	H4237	M8	34.5			15.0	1.0	8.4	13.5				
YRSGM10	H4238	12-10AWG	6.0			M10	34.5	15.0	1.0	10.5	13.5		
YRSGM12	H4239	M12	39.1			19.2	1.0	13.0	13.5				

UNINSULATED FORK UTILUG




- Electro tinned to minimise corrosion
- Square sides provide a non-turn capability
- Suits terminal blocks




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	DIMENSIONS mm					TOOL NO.
					A	B	C	E	F	
UF1.5M3	H4312	NO.1 12-16AWG	0.5	M3	16.0	6.4	0.7	3.7	4.8	00
UF1.5M4	H4314			M4	16.0	7.2	0.7	4.3	4.8	16
UF1.5M5S	H4315			M5	16.0	8.1	0.7	5.3	4.8	63-1
UF1.5M5L	H4317			M5	16.0	9.5	0.7	5.3	4.8	76B
UF2.5M3	H4321	NO.2 16-14AWG	1.5	M3	16.0	6.0	0.8	3.7	4.8	00
UF2.5M4	H4323			M4	16.0	7.2	0.8	4.3	4.8	18, 16
UF2.5M5L	H4326			M5	16.0	9.3	0.8	5.3	4.8	76B
UF6M3	H4332	NO.3 12-10AWG	2.5	M3	17.4	7.2	1.0	3.7	6.0	00
UF6M4	H4331			M4	18.5	9.0	1.0	4.3	6.0	16
UF6M5	H4333			M5	18.5	9.0	1.0	5.3	6.0	63-1
UF6M6	H4334			M6	24.5	12.0	1.0	6.4	6.0	18,76B, 124

4

SUPERGRIP FORK UTILUG




- Electro tinned to minimise corrosion
- Square sides provide a non-turn capability
- Suits terminal blocks




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	DIMENSIONS mm					TOOL NO.
					A	B	C	E	F	
RFSGM3	H4512	NO.1 22-16AWG	0.5	M3	21.5	6.4	0.7	3.7	10.5	76B
RFSGM4	H4514			M4	21.5	7.2	0.7	4.3	10.5	11C or 11B
RFSGM5S	H4515			M5	21.5	8.1	0.7	5.3	10.5	63-4B
RFSGM5L	H4517	RED	1.5	M5	21.5	9.5	0.7	5.3	10.5	102, 120
BFSGM3	H4521	NO.2 16-14AWG	1.5	M3	21.5	5.7	0.8	3.2	10.5	76B
BFSGM4	H4523			M4	21.5	7.2	0.8	4.3	10.5	12C or 12B
BFSGM5S	H4525			M5	21.5	7.9	0.8	5.3	10.5	63-4U
BFSGM5L	H4526	BLUE	2.5	M5	21.5	9.3	0.8	5.3	10.5	102, 120
YFSGM3	H4532	NO.3 12-10AWG	2.5	M3	24.9	7.2	1.0	3.7	13.5	76B
YFSGM4	H4531			M4	26.0	9.0	1.0	4.3	13.5	13B
YFSGM5	H4533			M5	26.0	9.0	1.0	5.3	13.5	63-5U
YFSGM6	H4534	YELLOW	6.0	M6	32.0	12.0	1.0	6.4	13.5	102, 120

PRE-INSULATED FORK UTILUG



- Copper electro tinned to minimise corrosion
- Square sides provide a non-turn capability




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	DIMENSIONS mm					MAX. INSUL. DIA. mm	TOOL NO.
					A	B	C	E	F		
RFM3	H4412	NO.1	0.5	M3	21.0	6.4	0.7	3.7	10.0	3.5	9A
RFM4	H4414	RED	TO	M4	21.0	7.2	0.7	4.3	10.0		11C OR 11B
RFM5S	H4415	22-16AWG	1.5	M5	21.0	8.1	0.7	5.3	10.0		63-4B
RFM5L	H4417		M5	21.0	9.5	0.7	5.3	10.0	99, 102, 120		
BFM3	H4421	NO.2	1.5	M3	21.0	6.0	0.8	3.7	10.0	4.3	9A
BFM4	H4423	BLUE	TO	M4	21.0	7.2	0.8	4.3	10.0		12C, 12B, 76B
BFM5S	H4425	16-14AWG	2.5	M5	21.0	7.9	0.8	5.3	10.0		63-4U
BFM5L	H4426		M5	21.0	9.3	0.8	5.3	10.0	99, 102, 120		
YFM3	H4432	NO.3	2.5	M3	25.5	8.3	1.0	3.7	13.0	6.1	9A
YFM4	H4431	YELLOW	TO	M4	25.5	9.0	1.0	4.3	13.0		13B, 76
YFM5	H4433	12-10AWG	6.0	M5	25.5	9.0	1.0	5.3	13.0		63-4B
YFM6	H4434		M6	31.5	12.0	1.0	6.4	13.0	99, 102, 120		



HIGH TEMPERATURE UTILUG RING TERMINAL

- Rated at 280°C
- Nickel plated




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	DIMENSIONS mm					MAX. INSUL. DIA. mm	TOOL NO.
					A	B	C	E	F		
RHT1.5M5	H3215	NO.1 22-16AWG	0.5 TO 1.5	M5	19.2	7.9	0.7	7.9	9.0	3.6	76B, 16
RHT2.5M4	H3223	NO.2 16-14AWG	1.5 TO 2.5	M4	22.5	8.7	0.7	8.7	11.1	4.3	76B 16
RHT2.5M5	H3225			M5	22.5	8.7	0.7	8.7	11.1		
RHT2.5M6	H3227			M6	27.8	12.7	0.7	12.7	11.1		
RHT6M5	H3233	NO.3	2.5 TO	M5	24.4	9.5	0.9	9.5	12.7	6.1	16, 18, 76B, 124
RHT6M6	H3234	12-10AWG	6.0	M6	29.3	12.7	0.9	12.7	12.7		



HEAVY DUTY INSULATED RING TERMINAL

- Seamless drawn copper tube electro tinned,
- black nylon insulator • Palms radiused




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	A	DIMENSIONS mm				MAX. INSUL. DIA. mm	TOOL NO.
					B	C	E	F			
RHD0.5M5S	H2001S	0.5	1/0.80	M5	26.0	8.6	0.9	11.1	12.7	3.5	76B, 60, 28A
RHD0.5M5L	H2001L			M5	29.4	8.7	0.9	15.1	12.7		
RHD0.5M6	H2002	2.5	1/0.80	M6	30.0	10.3	0.8	15.1	12.7	4.3	76B, 60, 28A
RHD2.5M5	H2036			M5	26.2	9.0	1.0	11.9	12.7		
RHD2.5M6	H2037	4.0	1/0.80	M6	30.9	10.3	0.9	15.1	12.7	6.1	76B, 60, 28A, 124
RHD4M5S	H2003S			M5	28.9	8.7	1.5	11.1	14.0		
RHD4M5L	H2003L	6	7/1.04	M5	32.6	8.7	1.4	14.7	14.0	6.8	60, 124
RHD4M6	H2004			M6	32.0	10.0	1.2	15.1	14.0		
RHD6M6	H2005	10	7/1.35	M6	31.0	10.0	1.2	15.1	13.0	8.3	60, 124
RHD10M6	H2006			M6	31.8	11.9	1.8	15.1	13.0		

4


BOOTLACE FERRULES

CAT NO.	Nominal Conductor (mm ²)	DIMENSIONS					COLOUR	CRIMPING TOOL NO.
		L	F	D	W			
BLF05	0.5	12.0	6.0	1.3	2.6	White	#112 #125	
BLF07	0.75	12.3	6.0	1.5	2.8	Blue	#112 #125	
BLF1	1.0	12.3	6.0	1.7	3.3	Red	#112 #125	
BLF2	1.5	14.3	8.0	2.0	3.5	Black	#112 #125	
BLF3	2.5	15.4	8.0	2.6	4.0	Grey	#112 #125	
BLF4	4	16.4	9.0	3.2	4.5	Orange	#112 #125 #126	
BLF6	6	20.5	12.0	3.9	6.0	Green	#112 #121 #126	
BLF10	10	20.8	12.0	4.9	7.5	Brown	#112 #121 #126	
BLF16	16	22.2	12.0	6.2	8.7	Ivory	#121	
BLF25	25	28.0	16.0	7.9	11.0	Black	#121	
BLF35	35	30.0	16.0	8.7	12.5	Beige	#122	
BLF50	50	36.0	20.0	10.9	15.0	Olive	#122	
BLF70	70	37.0	20.0	14.3	16.0	Yellow	#38A	
BLF95	95	44.0	25.0	15.3	18.5	Red	#38A	
BLF120	120	47.6	27.0	17.5	20.3	Blue	#38A	

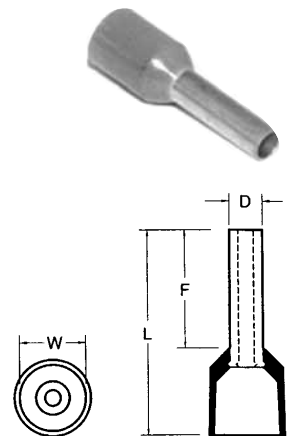

DUAL BOOTLACE FERRULES


CAT NO.	Nominal Conductor (mm ²)	DIMENSIONS					COLOUR	CRIMPING TOOL NO.
		L	F	D	W			
BLFT07	0.75	14.7	8.0	2.1	5.5	Grey	#112 #125	
BLFT1	1.0	15.1	8.0	2.3	5.5	Red	#112 #125	
BLFT2	1.5	15.5	8.0	2.6	6.4	Black	#112 #125	
BLFT3	2.5	18.5	10.0	3.3	8.0	Blue	#112 #125	
BLFT4	4	23.1	12.0	4.2	8.8	Grey	#112 #125	
BLFT6	6	26.1	14.0	5.3	9.5	Yellow	#112 #125	



UNINSULATED CRIMP PIN CONNECTOR



- Electro tinned copper to minimise corrosion
- Sizes 1, 2, 3 circular pin • Sizes 4, 5 flat pin




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	DIMENSIONS mm				TOOL NO.
				A	B	D	F	
UP1.5	H2271	NO.1	0.5-1.5	15.9	1.6	9.5	5.2	76B, 00, 16B, 21
UP2.5	H2272	NO.2	1.5-2.5	17.4	2.0	10.3	5.5	76B, 00, 16B, 21
UP6	H2273	NO.3	2.5-6.0	20.6	2.8	11.9	6.6	76B, 00, 16B, 21

PRE-INSULATED PIN CONNECTOR




- Electro tinned copper to minimise corrosion
- PVC insulation • Circular pin



DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	DIMENSIONS mm				MAX. INSUL. DIA mm	TOOL NO.
				A	B	D	F		
RP	H2276	NO.1 Red	0.5-1.5	21.0	1.6	9.5	10.3	3.3	76B, 11C, 11B, 99, 102, 120
BP	H2278	NO.2 Blue	1.5-2.5	23.8	2.0	10.3	11.9	4.3	76B, 12C, 12B, 99, 102, 120
YP	H2280	NO.3 Yellow	2.5-6.0	27.5	2.8	11.9	13.5	6.1	76B, 13B, 99, 102, 120

SUPERGRIP PIN CONNECTOR

- Electro tinned copper to minimise corrosion • Circular pin
- Fitted with a copper ferrule and pre-insulated for secure insulation support



DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	DIMENSIONS mm				MAX. INSUL. DIA mm	TOOL NO.
				A	B	D	F		
MYPSG	H3556	NO.0 Yellow	0.2-0.5	18.3	1.2	10.0	8.3	2.2	78
RPSG	H2286	NO.1 Red	0.5-1.5	21.0	1.6	9.5	10.3	3.5	76B, 11C, 11B, 99, 102, 120
BPSG	H2287	NO.2 Blue	1.2-2.5	23.8	2.0	10.3	11.9	4.3	76B, 12C, 12B, 99, 102, 120
YPSG	H2288	NO.3 Yellow	2.5-6.0	27.5	2.8	11.9	13.5	6.1	76B, 13B, 99, 102, 120

PRE-INSULATED AND SUPERGRIP CRIMP LINK CABLE CONNECTOR

- Solid drawn copper tube • Electro tinned to minimise corrosion
- Centre dimple to ensure correct conductor traverse inside link • Vinyl insulation

STYLE 1. Parallel splice conductor area shown is total of two (or more) conductors to be connected parallel.

Ideal for inline joints between uneven sized conductor – vinyl insulation.

STYLE 2. Centre dimple to ensure correct conductor positions – vinyl insulation.

STYLE 3. Supergrip butt splice with translucent insulation (to ensure correct conductor insertion) and depressed centre to enable use in appropriate ratchet crimp tool without removal of stopper.



STYLE 1.



STYLE 2.



STYLE 3.



Translucent insulation Link Super Grip Ferrules


DESCRIPT.	CAT NO.	INSULATION	CONDUCTOR AREA mm ²	STYLE	DIMENSIONS A mm	MAX. INSUL. DIA. mm	TOOL NO.
RL	H2068	Red	0.5-1.5	1	15.9	3.2	76B, 11C, 11B, 63-4B, 102, 120
BL	H2069	Blue	1.5-2.5	1	7.9	4.0	76B, 12C, 12B, 63-4U, 102, 120
YL	H2070	Yellow	2.5-6.0	1	20.4	5.5	76B, 13B, 63-5U, 102, 120
RLD	H2071	Red	0.5-1.5	2	22.2	3.2	76B, 11C, 11B, 63-4B, 102, 120
BLD	H2072	Blue	1.5-2.5	2	25.4	4.0	76B, 12C, 12B, 63-4U, 102, 120
YLD	H2073	Yellow	2.5-6.0	2	27.0	5.5	76B, 13B, 63-5U, 102, 120
RLSG	H3910	Red	0.5-1.5	3	31.0	4.0	76B, 11C, 11B, 63-4B, 102, 120
BLSG	H3911	Blue	1.5-2.5	3	31.0	4.6	76B, 12C, 12B, 63-4U, 102, 120
YLSG	H3912	Yellow	2.5-6.0	3	41.0	6.2	76B, 13B, 63-5U, 102, 120

4



CLOSED END PRE-INSULATED CABLE CONNECTOR

- Electro tinned to minimise corrosion
- Nylon insulation to maximise dielectric strength




DESCRIPT.	CAT NO.	STRANDING METRIC	I.D. mm B	DIMENSIONS A mm	TOOL NO.
CEC1	H349	2X24/0.20	2.08	15.1	76B, 11A, 11B
CEC2	H2023	2X24/0.20	3.3	21	28A
CEC5	H2026	2X50/0.25	4.5	27	28A
CEC1.5	H2047	2X32/0.20	2.5	15.2	76B, 11C, 11B
CEC2.5	H2048	2X32/0.20	3.7	18	76B, 13B
CEC4	H2050	2X32/0.20	3.35	19.1	76B, 13B
CEC8	H2049	5X32/0.20	5.0	30	76B

HEAVY DUTY PRE-INSULATED CRIMP LINK CONNECTOR




- Seamless drawn copper tube
- Black nylon insulated
- Centre dimple to help locate the conductor
- Electro tinned to minimise corrosion



DESCRIPT.	CAT NO.	CONDUCTOR AREA mm ²	STRANDING METRIC	DIMENSIONS A mm	MAX. INSUL. DIA. mm	TOOL NO.
LHD2.5S	H2051	CE2X24/0.2	1/0.80-7/0.67	30.1	4.7	28, 76B
LHD2.5	H2067	CE2X24/0.2	7/0.67	30.1	4.7	28, 76B
LHD4	H2052	CE2X24/0.2	7/0.67-7/0.85	32.3	6.4	28, 76B
LHD6	H2053	CE2X24/0.2	7/1.04	29.0	8.3	28
LHD10	H2054	CE2X24/0.2	7/1.35	29.0	8.3	76B, 13B




2.8mm Q.C. RECEPTACLE




DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
ROCSG2.8/0.8	H3558	1	Brass/PVC	0.25	ET	17.9	3.2	0.5-1.5	Red to suit 0.8 Tab
ROCSG2.8/0.5	H3564	1	Brass/PVC	0.25	ET	17.9	3.2	0.5-1.5	Red to suit 0.5 Tab




4.8mm Q.C. RECEPTACLES to suit 0.5mm tabs



DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
ROCSG4.8	H3559	1	Brass/PVC	0.40	ET	18.7	3.2	0.5-1.5	Red
ROCSG4.8F	H3563	2	Brass/PVC	0.35	ET	20.0	2.7	0.5-1.5	Red
BQCSG4.8	H3565	1	Brass/PVC	0.40	ET	18.7	4.0	1.5-2.5	Blue
BQCSG4.8F	H3566	2	Brass/PVC	0.35	ET	20.0	3.2	1.5-2.5	Blue

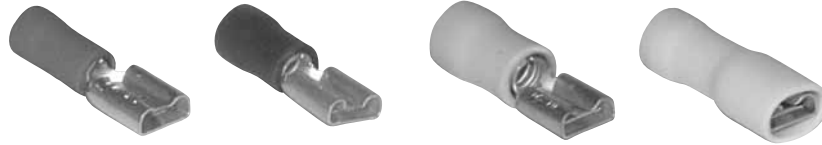


6.3mm Q.C. RECEPTACLES to suit 0.8mm tabs

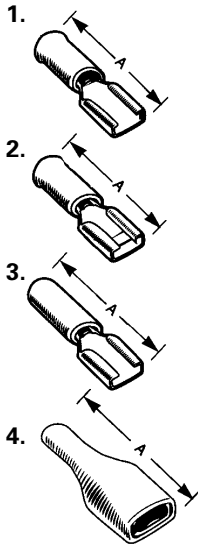

DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RQCSG6.3	H2594A	2	Brass/PVC	0.40	ET	20.5	3.5	0.5-1.5	Red
BQCSG6.3	H2595A	2	Brass/PVC	0.40	ET	20.5	4.3	1.5-2.5	Blue
YQCSG6.3	H2596A	2	Brass/PVC	0.40	ET	24.6	4.3	2.5-6.0	Yellow
RQCSG6.3L	H2594	1	Brass/PVC	0.40	ET	22.2	3.5	0.5-1.5	Red
BQCSG6.3L	H2595	1	Brass/PVC	0.40	ET	23.8	4.3	1.5-2.5	Blue
YQCSG6.3L	H2596	1	Brass/PVC	0.70	ET	25.4	6.0	2.5-6.0	Yellow
RQCSG6.3F	H3560	4	Brass/PVC	0.70	ET	22.0	2.7	0.5-1.5	Red
BQCSG6.3F	H3561	4	Brass/PVC	0.70	ET	22.0	3.2	1.5-2.5	Blue
YQCSG6.3F	H3562	4	Brass/PVC	0.70	ET	25.0	3.8	2.5-6.0	Yellow




6.3mm Q.C. TABS



DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RTSG6.3	H2844	1	Brass/PVC	0.80	ET	23.2	3.5	0.5-1.5	Red
BTSG6.3	H2845	1	Brass/PVC	0.85	ET	24.8	4.3	1.5-2.5	Blue
YTSG6.3	H2846	1	Brass/PVC	0.80	ET	26.3	6.0	2.5-6.0	Yellow




6.3mm ADAPTORS Q.C. PIGGY BACK



DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RPBSG6.3	H2847A	1	Brass/PVC	0.80	ET	22.2	3.5	0.5-1.5	Red
BPBSG6.3	H2848A	1	Brass/PVC	0.85	ET	22.2	4.3	1.5-2.5	Blue
YPBSG6.3	H2849	2	Brass/PVC	0.80	ET	33.4	6.0	2.5-6.0	Yellow




9.3mm Q.C. RECEPTACLES



DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
YQC9.3	H2853A	1	Brass/PVC	-	ET	29.2	6.2	2.5-6.0	Yellow


LIP BLADE TERMINALS

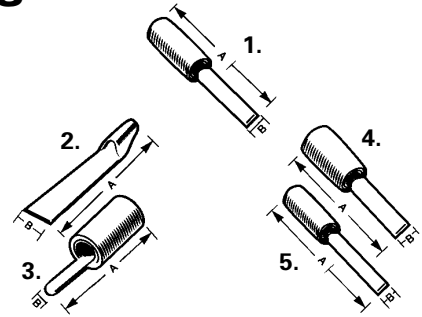

DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	WIDTH B mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RLB	H2736	1	Copper	0.7	ET	24.8	2.9	3.5	0.5-1.5	Red
BLB	H2737	1	Copper	0.7	ET	26.8	3.0	3.7	1.5-2.5	Blue
RLBSG	H2736A	1	Copper	0.8	ET	27.7	3.0	3.5	0.5-1.5	Red
BLBSG	H2737A	1	Copper	0.8	ET	27.7	3.0	4.1	1.5-2.5	Blue
YLBSG	H2738A	1	Copper	1.0	ET	30.7	3.0	4.1	1.5-2.5	Yellow
RLLBSG	H3916A	3	Copper	0.7	ET	17.2	3.0	3.5	0.25-1.5	Lipless Miniature Blade
BLLBSG	H3917A	3	Copper	0.7	ET	18.0	2.7	4.3	0.6-3.0	Lipless Miniature Blade
YLLBSG	H3918A	3	Copper	0.9	ET	22.4	2.7	6.3	2.5-6.0	Lipless Miniature Blade
RLLBSGL	H4107A	4	Copper	0.8	ET	28.5	2.0	3.5	0.5-1.5	Lipless Long Blade
BLLBSGL	H4108A	4	Copper	0.8	ET	28.5	2.0	4.3	1.5-2.5	Lipless Long Blade
RLBW	H4107	4	Copper	0.8	ET	25.8	4.6	3.5	0.5-1.5	Red
BLBW	H4108	4	Copper	0.8	ET	25.8	4.6	4.3	1.5-2.5	Blue
YLBW	H4109	4	Copper	0.8	ET	30.3	4.6	6.3	2.5-6.0	Yellow
RLBSGW	H4207	5	Copper	0.8	ET	26.4	4.6	3.5	0.5-1.5	Red Supergrip
BLBSGW	H4208	5	Copper	0.8	ET	26.4	4.6	4.3	1.5-2.5	Blue Supergrip
YLBWSGW	H4209	5	Copper	0.8	ET	30.8	4.6	6.3	2.5-6.0	Yellow Supergrip




BULLET TERMINAL



DESCRIPT.	CAT NO.	MATERIAL	FINISH	LENGTH A mm	LENGTH B mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RBSG	H3919	Brass/PVC	ET	20.2	4.0	3.5	0.5-1.5	Mates with H3922
BBSG	H3920	Brass/PVC	ET	20.7	5.0	4.3	1.5-2.5	Mates with H3923



BULLET RECEPTACLE



DESCRIPT.	CAT NO.	MATERIAL	FINISH	LENGTH A mm	LENGTH B mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RBRSG	H3922	Brass/PVC	ET	24.0	4.0	2.7	0.5-1.5	Mates with H3919
BBRSG	H3923	Brass/PVC	ET	25.0	5.0	3.2	1.5-2.5	Mates with H3920



LOOSE PIECE BRASS CONNECTORS

DESCRIPT.	MATERIAL	THICKNESS	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	HAND TOOLS	NOTES
BULLET RECEPTACLES							
H2743	Brass	0.45	17	3.3	0.7-2.1	#17, #61	mates with H2782
BULLET TERMINALS							
H2782	Brass	0.45	17	3.3	0.75-1.5	#17, #61	mates with H2743
6.3mm Q.C. RECEPTACLES							
H1972	Brass	0.45	19.8	2.8	0.7-2.1	#17, #61, #95	
H2833B	Nick/Silv	0.4	19.6	3.9	1.0-1.5	#17, #61, #95	Piggy Back
LANCED TAB							
H2832	Brass			3	0.7-2.1		
6.3mm Q.C. RECEPTACLES CRIMP TYPE							
H1192	Brass	0.08/.04	19.8	3.7	0.7-2.1	#17, #61, #95	
H1192B	Nick/Silv	0.8/0.4	19.8	3.7	0.7-2.1	#17, #61, #95	
LANCED Q.C. FOR LANCED CONNECTORS							
H3555	Brass	0.3	19.8	3.9	0.6-1.5	#17	
4.8mm Q.C. RECEPTACLES							
H1143	Brass	0.3	15.4	3.3	0.4-1.5	#61, #94	high temp
H2590B	Nick/Silv	0.4	15.4	3.3	0.4-1.5	#61, #94	high temp
FLAG TYPE TO SUIT 0.5mm TAB							
H1145	Brass	0.4	12.6	3.3	0.4-1.5	#147	
FLAG TYPE							
H1191B	Nick/Silv	0.45	15.1	3.3	0.7-2.1	#14	Housing H2818, H2819
4.8mm FLAG TYPE TO SUIT 0.5mm TAB							
H1145B	Nick/Silv	0.4	12.6	3.3	0.4-1.0	#147	
EYE TERMINAL TO SUIT 5mm STUD							
H430	Brass	0.55	21.4	3.9	0.5-2.5	#17, #61	hole, slot, screw 5.3
H430B	Brass	0.55	21.4	3.9	0.5-2.5	#17, #61	hole, slot, screw 5.3

TK22 ELECTRICAL TERMINAL KIT

- 1405 mixed supergrip terminals for 240V/415V applications
- Quality ratchet crimping tool (#102) • Tough metal carry case.



CONTENTS:

CAT. NO.	DESCRIPTION	QTY
H2594A	6.3mm QC Receptacle Red	50
H2595	6.3mm QC Receptacle Blue	100
H2596A	6.3mm QC Receptacle Yellow	50
H2844	6.3mm QC Tab Red	50
H2845	6.3mm QC Tab Blue	100
H2848	6.3mm QC Piggy Back Adaptor	50
H3560	6.3mm QC Receptacle Red	50
H3561	6.3mm QC Receptacle Blue	50
H3562	6.3mm QC Receptacle Yellow	40
H3563	4.8mm QC Receptacle Red	50
H3910	Window Crimp Link Red	50
H3911	Window Crimp Link Blue	50
H3912	Window Crimp Link Yellow	25
H4213	4.3mm Supergrip Ring Terminal Red	100
H4215	5.3mm Supergrip Ring Terminal Red	100
H4218	6.4mm Supergrip Ring Terminal Red	80
H4223	4.3mm Supergrip Ring Terminal Blue	100
H4225	5.3mm Supergrip Ring Terminal Blue	70
H4234	6.4mm Supergrip Ring Terminal Yellow	40
H4523	4.3mm Supergrip Fork Terminal Blue	100
H4514	4.0mm Spade Connector	100
#102	Crimping Tool	1