

Wiha Tools

For all work on or around
electrical components.




wiha 

Tools that work for you


Wiha PicoFinish electric.

The VDE-GS tested precision screwdriver.



The smooth-running turn-cap enables fast turning.

Imprint with the screw symbol and sizes eases recognition.

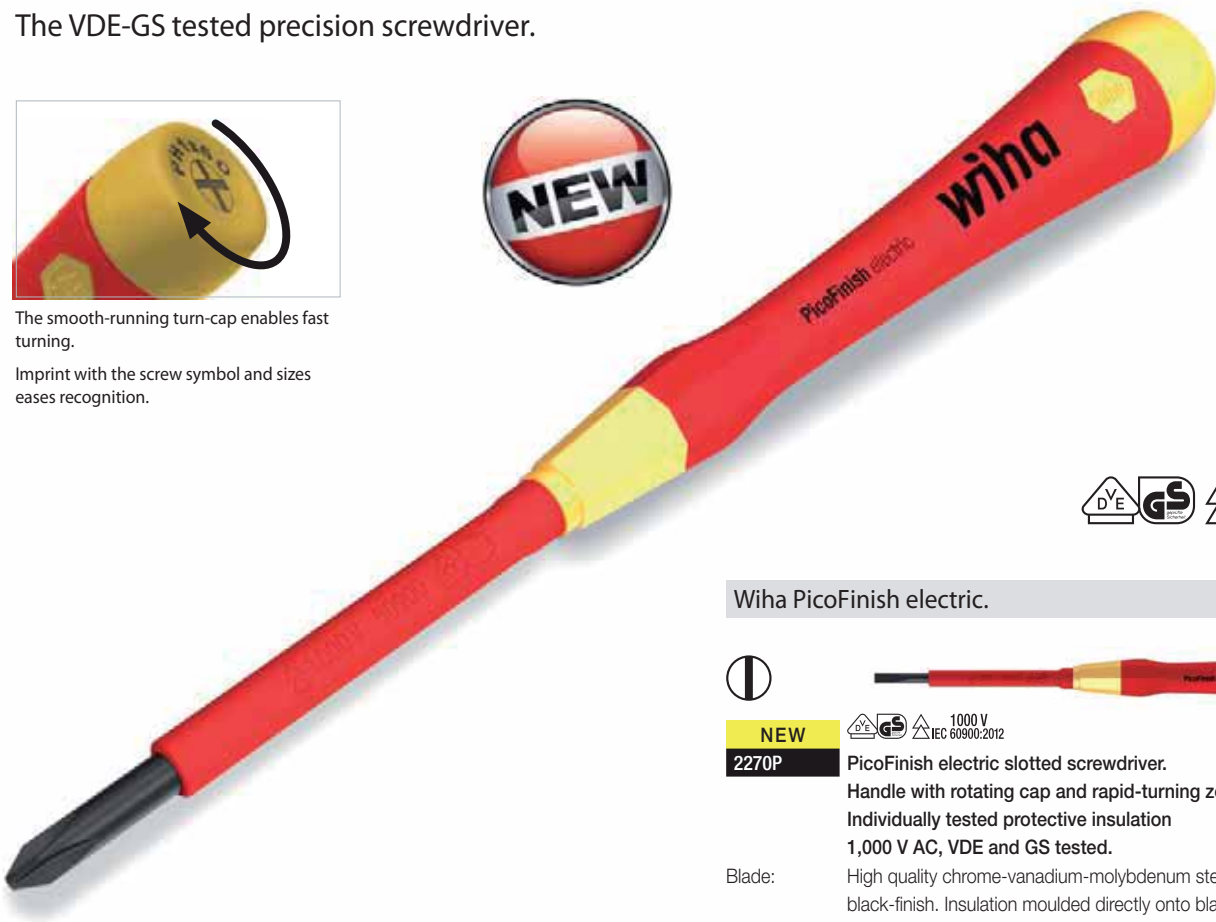

Wiha PicoFinish electric.



NEW 2270P PicoFinish electric slotted screwdriver.

Handle with rotating cap and rapid-turning zone.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.

Handle: Wiha PicoFinish handle for sensitive and fast screw fixing.

Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	⌀	↔	⊖	●	↔	+	⊖
38874	1.5	40	0.25	2.0	154	9	10
38875	2.0	60	0.4	2.0	160	18	10
38876	2.5	60	0.4	2.5	160	18	10
38877	3.0	60	0.5	3.0	160	18	10
38878	3.5	60	0.6	3.5	160	18	10

Wiha LiftUp electric.

With 6 SlimBits.

For slotted and Phillips screws.



NEW 2831 09 020 Magazine Bit Holder LiftUp electric with 6 slimBits.
Doubled safety: slimBits and magazine are individually VDE-GS tested.

Blade: Chrome-vanadium steel, through-hardened.
Insulation moulded directly onto blade.

Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.
Internal magazine accommodates 6 common slimBits.
Upon opening the magazine holder fans out enabling easy removal of slimBits.

Turnable cap for comfortable handling.

Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
Easily turnable guide sleeve provides support when fastening.
Suitable for 6 mm slimBits only.

Application: Compact magazine screwdriver for electrical applications, especially for mobile applications.

Attention: Not for use with bit styles C 6.3 and E 6.3.

Order-No.	Series				
38610	2831 09 020	5			
⌀	2831-10	1x2.5	1x3.0	1x4.0	1x5.5
⊕	2831-11	1xPH1	1xPH2		



NEW 2271P PicoFinish electric Philips screwdriver.

Handle with rotating cap and rapid-turning zone.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: DIN ISO 8764.

Order-No.	⊕	↔	●	↔	+	⊖
38879	PH00	60	2.0	154	9	10
38880	PH0	60	3.0	160	18	10
38881	PH1	60	4.0	160	18	10



NEW 2270P K6 PicoFinish electric slotted/Phillips screwdriver set, 6-pcs.

Individually tested protective insulation
1,000 V AC, VDE and GS tested.


Order-No.	Series				
38996	2270P K6	1			
⌀	2270P	1.5x40	2.0x60	2.5x60	3.0x60
⊕	2271P	PH00x60	PH0x60		

Wiha Professional electric.

Completely Reliable.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Combination and Stripping Pliers.

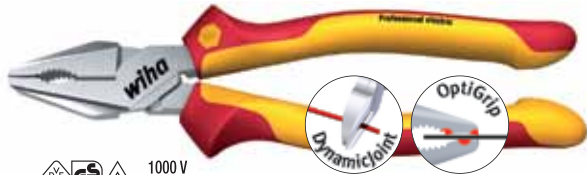


1000 V
IEC 60900:2004

Z 02 0 06 High leverage combination pliers Professional electric. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Standards: DIN ISO 5746. Manufactured based on IEC 60900:2004.
Head shape: Solid construction for heaviest strain.
Design: Perfectly mated cutters, additionally induction hardened cutting edge to approx. 64 HRC. Crosswise serrated gripping zone in the jaws for maximum gripping power and an additional crimping station for standard connectors. The Wiha DynamicJoint ensures optimal transmission of hand strength to the cutting edges.
Material: High-quality tool steel, specially tempered.
Application: Universally applicable – for strong gripping and pulling, for cutting of circular and multi-core cables, with pipe gripping station and additional crimping solution for standard connectors.

Order-No.	mm	II	○	●	●	↵	SB
26714	200	8	3,8	2,8	2,3	330	5

Lineman's Pliers Insulated with Crimper.

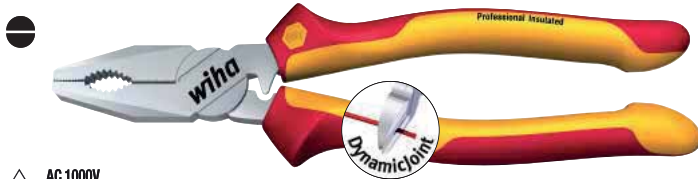

AC 1000V
IEC 60900:2004

Z 01 1 06 Lineman's pliers Professional Insulated with crimper. Insulation 1000 V AC.

Approved for work in area of live parts up to 1000 V AC.

Order-No.	mm	II	○	●	↵	SB
35716	220	9	4,6	3,0	440	5

Needle Nose Pliers.



1000 V
IEC 60900:2004

Z 05 0 06 Needle nose pliers Professional electric with cutting edge.

Order-No.	mm	II	○	●	↵	SB
26727	200	8	2,8	2,0	200	5

Diagonal Cutters.



1000 V
IEC 60900:2004

Z 16 0 06 Heavy duty diagonal cutters Professional electric.

Order-No.	mm	II	○	●	●	↵	SB
26737	140	5 ½	4,0	2,5	1,8	160	5
26751	180	7	3,8	2,7	2,3	260	5
26754	200	8	4,2	3,0	2,5	315	5

Details of cutting results of cutting pliers.

Symbol	Types of wire	Example	Tensile strength ca. N/mm ²
○	Soft wire	Copper, aluminium	220 - 250
◐	Medium hard wire	Iron nail	750 - 800
◑	Hard wire	Spring wire, steel nails	1,600 - 1,800
●	Piano wire	Hardened spring steel	2,200 - 2,300

Test wires standardised in DIN ISO 5744



1000 V
IEC 60900:2012

NEW
Z 18 0 06 BiCut Professional electric - switchable high-performance diagonal cutters. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	mm	II	○	●	↵	g	SB
38191	200	8	3,5	3	350		5
38984	200	8	3,5	3	350	x	5

Cable Cutters.



1000 V
IEC 60900:2004


Z 50 1 06 Cable cutters Professional electric.

Order-No.	mm	II	∅	mm ²	↵	SB
34743	160	6 ½	16	50	190	5
34744	200	8	20	60	305	5

Wiha Info

NEW Opti-Grip – optimal grip due to newly designed gripping surfaces

- **A firm hold:** The 'triple-point support' protects the workpiece from twisting or slipping.
- **Highly effective:** Optimum grip even with a large jaw opening – and at the same time significantly less force needed
- **A wide selection:** Now in standard Wiha combination pliers and high leverage combination pliers



Wiha SoftFinish® electric slimFix.

The safe and comfortable insulated VDE screwdriver.



All drivers individually tested protective insulation 1,000 V AC, VDE and GS tested



3201 SoftFinish® electric slimFix slotted screwdriver.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Protective insulation moulded directly onto the blade and completely integrated into the blade in the lower area.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2004.

Application: For all work on or around electrical components up to 1000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.

Order-No.	Ø	↔	↔	↔	↔
35446	3,5	100	0,6	204	23
35390	4,0	100	0,8	211	30
35501	4,5	125	1,0	236	30
35391	5,5	125	1,0	243	36
35392	6,5	150	1,2	268	36



3211 SoftFinish® electric slimFix Phillips screwdriver.

Order-No.	⊕	↔	↔	↔	↔
35393	PH1	80	191	30	10
35394	PH2	100	218	36	10



3241 SoftFinish® electric slimFix Pozidriv screwdriver.

Order-No.	⊕	↔	↔	↔	↔
35395	PZ1	80	191	30	10
35396	PZ2	100	218	36	10



slimTECHNOLOGY



NEW SB3201S201 SoftFinish® electric slimFix slotted/Phillips screwdriver set, 2-pcs.

Order-No.	Series	↔
36331	SB3201S201	1
⊖	3201	3,5x100
⊕	3211	PH2x100



Order-No.	Series	↔
36332	SB3201S202	1
⊖	3201	3,5x100
⊕	3241	PZ2x100



Order-No.	Series	↔
36333	SB3201S204	1
⊖	3201	3,5x100
⊕	3281	SL/PZ2x100



NEW 3251 SoftFinish® electric slimFix TORX® screwdriver.

Order-No.	⊖	↔	↔	↔	↔
36536	T10	100	204	23	10
36537	T15	100	211	30	10
36538	T20	100	211	30	10
36539	T25	125	243	36	10
36540	T27	125	243	36	10
36541	T30	125	243	36	10
36542	T40	150	268	36	5



NEW 3271 SoftFinish® electric slimFix Xeno screwdriver.

Order-No.	⊕	↔	↔	↔	↔
35502	SL/PH1	80	191	30	10
35503	SL/PH2	100	218	36	10



NEW 3281 SoftFinish® electric slimFix Xeno screwdriver.

Order-No.	⊕	↔	↔	↔	↔
36329	SL/PZ1	80	191	30	10
36330	SL/PZ2	100	218	36	10



NEW 3581 SoftFinish® electric slimFix square (Robertson) screwdrivers.

Order-No.	⊖	⊖	↔	↔	↔	↔
35504	Robertson 1	2,3	100	211	30	10
35505	Robertson 2	2,8	125	243	36	10

SoftFinish® electric slimFix set.



3201 K6 SoftFinish® electric slimFix slotted/ Phillips screwdriver set, 6 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	Series	↔
35389	3201 K6	1
⊖	3201	3,5x100 4,0x100 5,5x125 6,5x150
⊕	3211	PH1x80 PH2x100



NEW 3201NZK6 SoftFinish® electric slimFix square (Robertson) screwdriver set, 6 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	Series	↔
35907	3201NZK6	1
⊖	3201	3,5x100 4,0x100 5,5x125 6,5x150
⊕	3241	PZ1x80 PZ1x80
⊖	3581	SQ1x100 SQ2x125

Wiha SoftFinish® electric.

The safe and comfortable insulated VDE screwdriver.



320N SoftFinish® electric slotted screwdriver.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2004.

Application: For all work on or around electrical components up to 1000 V AC.

Order-No.	⊖	↔	⊕	↔	⚡	⚡
00819	2,0	60	0,4	164	23	10
00820	2,5	75	0,4	179	23	10
00821	3,0	100	0,5	204	23	10
00822	3,5	100	0,6	204	23	10
00823	4,0	100	0,8	211	30	10
00824	4,5•	125	1,0	236	30	10
00825	4,5•	175	1,0	286	30	5
31863	4,5•	200	1,0	311	30	10
00826	5,5	125	1,0	243	36	10
00827	5,5•	175	1,0	293	36	5
00828	6,0•	150	1,2	268	36	10
00829	6,5	150	1,2	268	36	10
00830	8,0	175	1,2	299	41	10
00831	8,0	175	1,6	299	41	10
00832	10,0	200	1,6	324	41	10

• Additional dimension. Non-DIN size.



321N SoftFinish® electric Phillips screwdriver.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊕	↔	↔	⚡	⚡
00846	PH0	60	164	23	10
00847	PH1	80	191	30	10
00848	PH2	100	218	36	10



324 SoftFinish® electric Pozidriv screwdriver.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊕	↔	↔	⚡	⚡
00877	PZ0	60	164	23	10
00878	PZ1	80	191	30	10
00879	PZ2	100	218	36	10



358N SoftFinish® electric square (Robertson) screwdriver.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊖	↔	↔	⚡	⚡	
32396	Robertson 1	2,3	100	211	30	10
32397	Robertson 2	2,8	150	268	36	10



325 SoftFinish® electric TORX® screwdriver.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊕	↔	↔	⚡	⚡
03760	T5	60	164	23	10
03761	T6	60	164	23	10
03762	T7	60	164	23	10
00881	T8	60	164	23	10
00882	T9	60	164	23	10

* Torx T10 to T40 in SlimFix range only

For hex nuts.



322 K5 SoftFinish® electric hex nut driver set, 5 pcs.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Chrome-vanadium steel, through hardened, black-finish. Insulation moulded directly onto blade. Deep drawn socket.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2004.

Application: For all work on or around electrical components up to 1000 V AC.

Order-No.	Series	⚡
29466	322 K5	1
⊖	322	5,5x125 7x125 8x125 10x125 13x125

Wiha SoftFinish® electric Xeno.

For Terminal Screws (Slotted/ Phillips).

⊕ SL/PH



⊕



1000 V
IEC 60900:2004

327 SoftFinish® electric Xeno.

For terminal screws (slotted/ Phillips). Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2004.

Application: For all work on or around electrical components up to 1000 V AC. No slipping and better torque transfer with terminal screws e.g. in switch-cabinets, fuse boxes and terminal blocks.

Order-No.	⊕	←	→	↓	▬
30716	SL/PH1	80	191	30	10
30715	SL/PH2	100	218	36	10

⊕



1000 V
IEC 60900:2004

SB327 S2 SoftFinish® electric Xeno screwdriver set, 2 pcs.

For terminal screws (slotted/ Phillips). Individually tested protective insulation 1,000 V AC, VDE and GS tested. Blister packed.

Order-No.	Series	▬
32281	SB327 S2	1
⊕	327	SL/PH1x80 SL/PH2x100

For Terminal Screws (Slotted/ Pozidriv).

⊗ SL/PZ



⊗



1000 V
IEC 60900:2004

328 SoftFinish® electric Xeno.

For terminal screws (slotted/ Pozidriv). Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊗	←	→	↓	▬
30700	SL/PZ1	80	191	30	10
30701	SL/PZ2	100	218	36	10

⊗




1000 V
IEC 60900:2004

SB328 S2 SoftFinish® electric Xeno screwdriver set, 2 pcs.

Individually tested protective insulation 1,000 V AC, VDE and GS tested. Blister packed.

Order-No.	Series	▬
32282	SB328 S2	1
⊗	328	SL/PZ1x80 SL/PZ2x100

Sets.

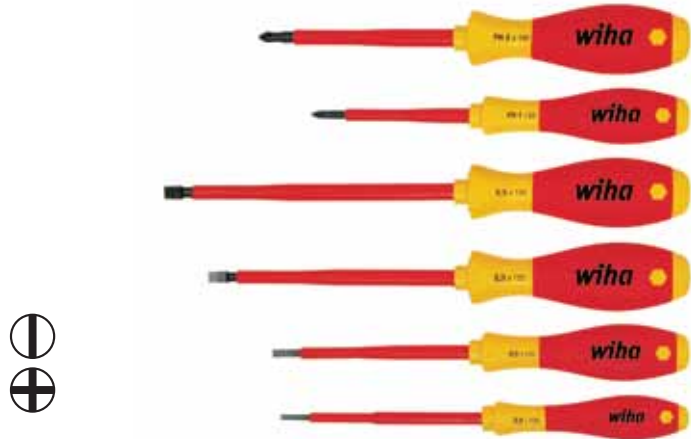


⊕

1000 V
IEC 60900:2004

320N K6 SoftFinish® electric slotted/ Phillips screwdriver set, 6 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	Series	▬
00833	320N K6	1
⓪	320N	3,0x100 4,0x100 5,5x125 6,5x150
⊕	321N	PH1x80 PH2x100

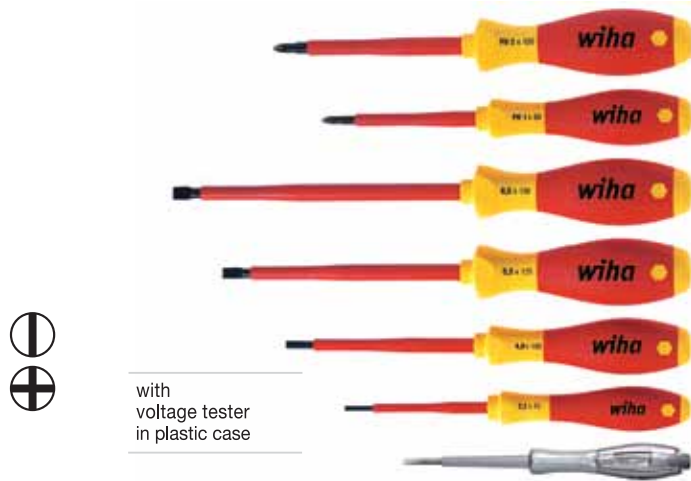

⊕

with voltage tester in plastic case

1000 V
IEC 60900:2004

320N K7 SoftFinish® electric slotted/ Phillips screwdriver set, 7 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	Series	▬
27564	320N K7	1
⓪	320N	2,5x75 4,0x100 5,5x125 6,5x150
⊕	321N	PH1x80 PH2x100
⓪	255-11	3,0x0,5

⊗ ⊕

1000 V
IEC 60900:2004

320NZK6 SoftFinish electric Slotted/Pozi/Square screwdriver set 6 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	Series	▬
31062	320NZK6	1
⓪	320N	3,5x100 5,5x125
⊗	324	PZ1x80 PZ2x100
⓪	358N	SQ1x100 SQ2x125

Wiha Torque VDE Screwdrivers.

Precise and High Repeat Accuracy.



All drivers individually tested protective insulation 1,000 V AC, VDE and GS tested



SlimBits.



2831-10 SoftFinish® electric slimBit, slotted.

Standards: Manufactured acc. to IEC 60900:2004.
Material: High-quality chrome vanadium steel, through-hardened, bronzed. Protective insulation moulded directly onto the bit and completely integrated into the blade in the lower area from size 4.0.
Application: For all work on or around electrical components up to 1000 V AC.
Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated. The slim form of the bit allows easy reaching of the screws below the finger and hand guards.
Attention: 6 mm slimBits only to be used in the slimVario bit holder and slimTorque VDE bit holder (VDE torque system).

Order-No.	⌀	↔	⊕	⊙		▬
34578	2,5	75	0,4	6,0	no slim version	1
34579	3,0	75	0,5	6,0	no slim version	1
34580	4,0	75	0,8	6,0		1
34581	5,5	75	1,0	6,0		1
34582	6,5	75	1,2	6,0		1



2831-11 SoftFinish® electric slimBit, Phillips.

Order-No.	⊕	↔	⊙	▬
34583	PH1	75	6,0	1
34584	PH2	75	6,0	1



2831-12 SoftFinish® electric slimBit, Pozidriv.

Order-No.	⊕	↔	⊙	▬
34585	PZ1	75	6,0	1
34586	PZ2	75	6,0	1



NEW 2831-17 SoftFinish® electric slimBit, square (Robertson).

Order-No.	⊙	⊕	↔	⊙	▬
35510	Robertson 1	2,3	75	6,0	1
35511	Robertson 2	2,8	75	6,0	1



NEW 2831-13 SoftFinish® electric slimBit, Xeno, for terminal screws (slotted/ Phillips)

Order-No.	⊕	↔	⊙	▬
34587	SL/PH1	75	6,0	1
34588	SL/PH2	75	6,0	1



2831-14 SoftFinish® electric slimBit for terminal screws (slotted/Pozidriv).

Order-No.	⊕	↔	⊙	▬
34589	SL/PZ1	75	6,0	1
34590	SL/PZ2	75	6,0	1



NEW 2831-15 SoftFinish® electric slimBit, TORX®

Order-No.	⊕	↔	⊙	▬
35506	T8	75	6,0	1
35507	T10	75	6,0	1
35508	T15	75	6,0	1
35509	T20	75	6,0	1
36071	T25	75	6,0	1

Torque Set.



Order-No.	Series	▬
36078	2872 T10	1
2872	TorqueVario®-S VDE torque screwdriver, Model 1.0 – 5.0 Nm	
2831-00	SoftFinish® electric slimVario bit holder with handle and ClicFix, 6.0 mm.	
2879	slimTorque VDE bit holder for 6 mm slimBits.	
285-900	Torque-Setter	
⊕	2831-10	1x4,0 1x5,5
⊕	2831-11	1xPH1 1xPH2
⊕	2831-12	1xPZ1 1xPZ2

TorqueVario®-S VDE. SlimTorque VDE bit holder.



with scale
2872 TorqueVario®-S VDE torque screwdriver. Insulation up to 1,000 V AC, GS-mark. Torque value can be set via window scale. Automatic release.

Order-No.	Nm	±%	⊕	↔	⊙	▬
26625	0.6-2.0	6%	3.8	131	30	1
26626	1.0-5.0	6%	3.8	138	36	1
26627	2.0-8.0	6%	3.8	142	41	1

Wiha Merchandising

Contact us for more information on merchandising options.



Your stockist:



wiha 
Tools that work for you

Premium Tools (Aust) Pty Ltd
Tel. +61 (02) 4684 1460
Fax. +61 (02) 8088 7272
Email. sales@wiha.com.au

Premium Tools (NZ) Ltd
Tel. +64 (09) 444 2560
Fax. +64 (09) 355 0411
Email. sales@wiha.co.nz

www.wiha.com.au
www.wiha.co.nz