




Wiha PicoFinish electric.

The VDE-GS tested precision screwdriver.



The smooth-running turn-cap enables fast turning.

Imprint with the screw symbol and sizes eases recognition.

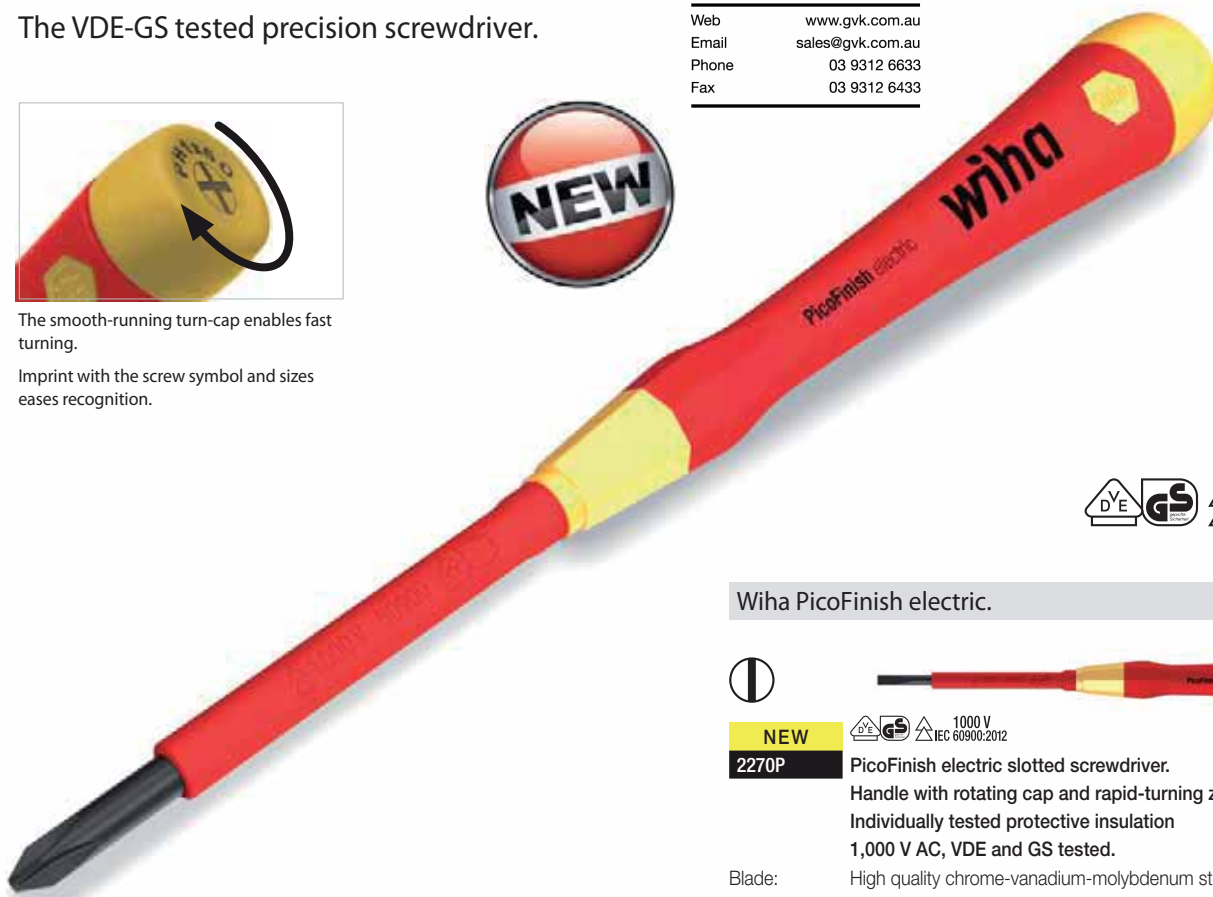

Wiha PicoFinish electric.



NEW 2270P PicoFinish electric slotted screwdriver.

Handle with rotating cap and rapid-turning zone.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.

Handle: Wiha PicoFinish handle for sensitive and fast screw fixing.

Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

| Order-No. | ⌀ | ↔ | ⊖ | ● | ↔ | + | ⊖ |
|-----------|-----|----|------|-----|-----|----|----|
| 38874 | 1.5 | 40 | 0.25 | 2.0 | 154 | 9 | 10 |
| 38875 | 2.0 | 60 | 0.4 | 2.0 | 160 | 18 | 10 |
| 38876 | 2.5 | 60 | 0.4 | 2.5 | 160 | 18 | 10 |
| 38877 | 3.0 | 60 | 0.5 | 3.0 | 160 | 18 | 10 |
| 38878 | 3.5 | 60 | 0.6 | 3.5 | 160 | 18 | 10 |

Wiha LiftUp electric.

With 6 SlimBits.

For slotted and Phillips screws.



NEW 2831 09 020 Magazine Bit Holder LiftUp electric with 6 slimBits.
Doubled safety: slimBits and magazine are individually VDE-GS tested.

Blade: Chrome-vanadium steel, through-hardened.
Insulation moulded directly onto blade.

Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.
Internal magazine accommodates 6 common slimBits.
Upon opening the magazine holder fans out enabling easy removal of slimBits.

Turnable cap for comfortable handling.
Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
Easily turnable guide sleeve provides support when fastening.
Suitable for 6 mm slimBits only.

Application: Compact magazine screwdriver for electrical applications, especially for mobile applications.

Attention: Not for use with bit styles C 6.3 and E 6.3.

| Order-No. | Series | | | | |
|-----------|-------------|-------|-------|-------|-------|
| 38610 | 2831 09 020 | 5 | | | |
| ⌀ | 2831-10 | 1x2.5 | 1x3.0 | 1x4.0 | 1x5.5 |
| ⊕ | 2831-11 | 1xPH1 | 1xPH2 | | |



NEW 2271P PicoFinish electric Philips screwdriver.

Handle with rotating cap and rapid-turning zone.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: DIN ISO 8764.

| Order-No. | ⊕ | ↔ | ● | ↔ | + | ⊖ |
|-----------|------|----|-----|-----|----|----|
| 38879 | PH00 | 60 | 2.0 | 154 | 9 | 10 |
| 38880 | PH0 | 60 | 3.0 | 160 | 18 | 10 |
| 38881 | PH1 | 60 | 4.0 | 160 | 18 | 10 |



NEW 2270P K6 PicoFinish electric slotted/Phillips screwdriver set, 6-pcs.

Individually tested protective insulation
1,000 V AC, VDE and GS tested.

| Order-No. | Series | | | | |
|-----------|----------|---------|--------|--------|--------|
| 38996 | 2270P K6 | 1 | | | |
| ⌀ | 2270P | 1.5x40 | 2.0x60 | 2.5x60 | 3.0x60 |
| ⊕ | 2271P | PH00x60 | PH0x60 | | |